


F200K

LOAD CLASS
UP TO F900
EN-1433 STANDARD

ULMA Linear Drainage Channel type F200K: External width 262 mm; Internal width 200 mm; Available with overall heights between 263 mm and 363 mm. Suitable for cascaded type slope to collect rainwater in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanized steel* edges for lateral protection.




*Also available with cast iron edges.

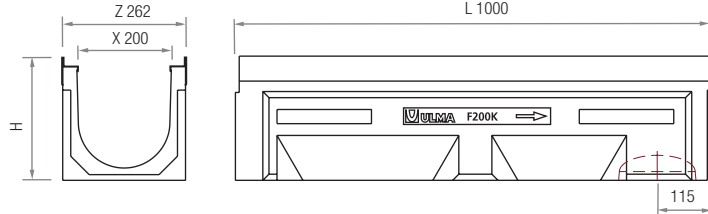

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
F200K00R	1000	263	262	200	160	-	374	28
F200K10R	1000	313	262	200	160	160	473	21
F200K20R	1000	363	262	200	160	160	571	21

*Vert. and horiz. outlets on order.




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	D400	FNX200FTDM	500	251	13,75	2
	SLOTTED	E600	FNX200FTEM	500	251	13,75	2
	SLOTTED	F900	FNX200FTFM	500	251	19	2
	SOLID	F900	FC200FTFM	500	251	-	2

LOCKING SYSTEM

8 BOLT LOCKING SYSTEM.
8 screws with protection cap, per linear metre.

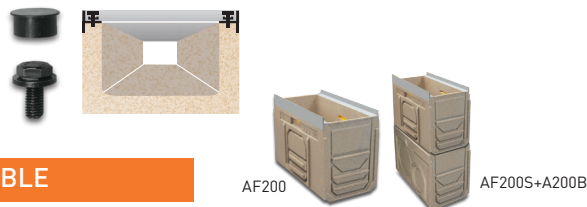

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AF200	500	363	262	160/200	-	1	-
AF200S + A200B	500	705*	262	160/200	-	2	C200

* The sump unit can be higher incorporating an intermediate unit.

END CAPS		Closed		Open	
Channel	Code	Type	Ø (mm)		
F200K00R	T200K00C	CLOSED	-		
	T200K00A	OPEN	200		
F200K10R	T200K10C	CLOSED	-		
	T200K10A	OPEN	200		
F200K20R	T200K20C	CLOSED	-		
	T200K20A	OPEN	200		

STEP UNITS
Code
CE200

GALVANIZED STEEL BUCKET *
Code
C200



*Only applicable if 2 sump units are installed.

SLOPE DESIGNS

