



HYDRO

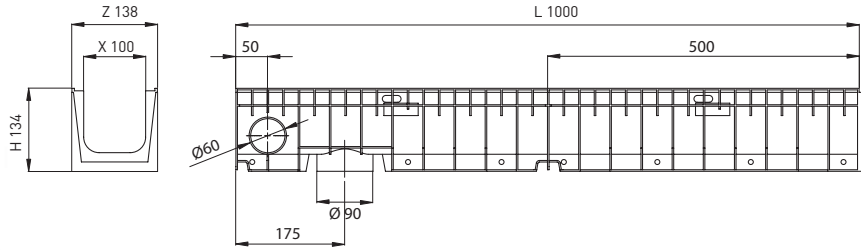

Code	L (mm)	H (mm)	Width (mm)		Ø Outlet (mm)		Hydraul. Section (cm ²)	Pcs (x pallet)
			Z	X	Vert.	Horiz.		
HYDRO	1000	134	138	100	90	60	97	90

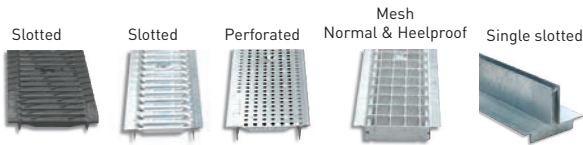



GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x lm)
DUCTILE IRON	SLOTTED	B125	FNX100UCBM	500	130	6	2
	SLOTTED	C250	FNX100UCCM	500	130	6	2
GALVANIZED STEEL	SLOTTED	A15	GN100UOA (1)	1000	130	3	1
	SLOTTED	A15	GN100UCA	1000	130	3	1
	PERFORATED	A15	GP100UCA	1000	130	3	1
	MESH	B125	GEX100UCB33	1000	130	2	1
	HEELPROOF MESH	B125	GEHX100UCB	1000	130	2	1
	SINGLE SLOTTED	C250	GR100UOC	1000	130	70	1
	DOUBLE SLOTTED	C250	GDR100UOC	1000	130	70	1
STAINLESS STEEL	SLOTTED	A15	IN100UCA	1000	130	3	1
	PERFORATED	A15	IP100UCA	1000	130	3	1
	MESH	B125	IEX100UCB	1000	130	3	1

(1) Without screws

LOCKING SYSTEM

LOCKING BAR. Two locking bars and two screws per linear metre.



END CAPS

Code	Type	Ø (mm)
TH100C	CLOSED	-
TH100A	OPEN	Ø90

LEAF GUARD

Code
FS90

