


F300K

LOAD CLASS
UP TO F900
EN-1433 STANDARD

ULMA Linear Drainage Channel type F300K: External width 362 mm; Internal width 300 mm; Available with overall heights between 300 mm and 600 mm. Suitable for cascaded type slope to collect rainwater in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanized steel* edges for lateral protection.



*Also available with cast iron edges.

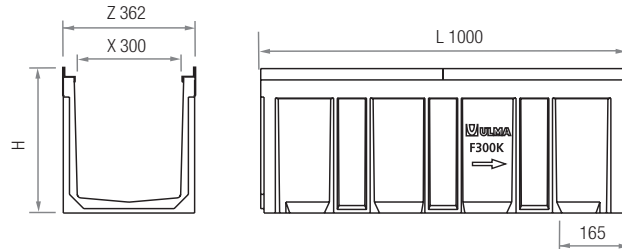

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
F300K00R	1000	300	362	300	250	-	725	15
F300K00R	1000	390	362	300	200	-	975	15
F300K10R	1000	440	362	300	200	-	1110	10
F300K20R	1000	490	362	300	200	-	1255	10
F300K60R	1000	600	362	300	-	-	1525	6

*Vert. outlets on order.




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX300FTCM	500	351	13,75	2
	SLOTTED	D400	FNX300FTDM	500	351	13,75	2
	SLOTTED	F900	FNX300FTFM	500	351	14	2
	SOLID	F900	FC300FTFM	500	351	-	2
GALVANIZED STEEL	SINGLE SLOT	D400	GRL300FOD (1)	1000	351	18 / H150	1

(1) Without screws.

LOCKING SYSTEM

8 BOLT LOCKING SYSTEM.
8 screws with protection cap, per linear metre.

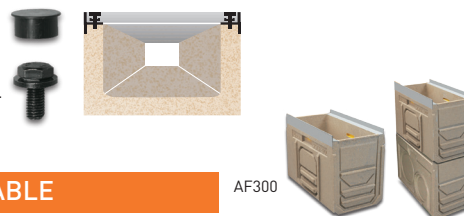

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AF300*	500	390	362	200	-	1	-
AF300S + A300B*	500	730**	362	200	-	2	C300

* Available up to 490 mm height (F300K20R).

** The sump unit can be higher incorporating an intermediate unit

END CAPS		Closed		Open	
Channel	Code	Type	Ø (mm)		
F300K00R	T300K00C	CLOSED	-		
	T300K00A	OPEN	300		
F300K10R	T300K10C	CLOSED	-		
	T300K10A	OPEN	300		
F300K20R	T300K20C	CLOSED	-		
	T300K20A	OPEN	300		

STEP UNITS

Code
CE300

GALVANIZED STEEL BUCKET*

Code
C300



*Only applicable if 2 sump units are installed.

SLOPE DESIGNS

