
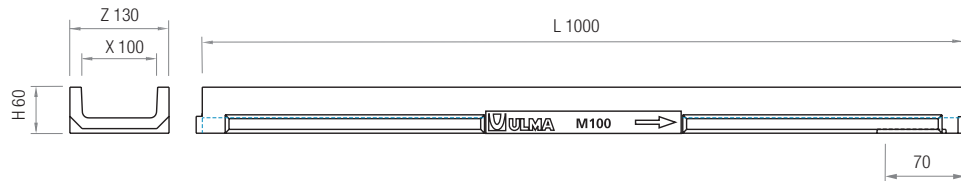


M100


LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M100: External width 130 mm; Internal width 100 mm and overall height 60 mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.



Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M100	1000	60	130	100	90	-	40	120


*Vert. outlets on order.

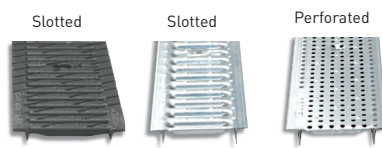

GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX100UCBM	500	130	6	14,9	2
	SLOTTED	C250	FNX100UCCM	500	130	7	13	2
GALVANIZED STEEL	SLOTTED	A15	GN100UCA	1000	130	3	9	1
	SLOTTED	A15	GN100UOA (1)	1000	130	3	8	1
	PERFORATED	A15	GP100UCA	1000	130	3	Ø6	1
STAINLESS STEEL	SLOTTED	A15	IN100UCA	1000	130	3	7	1
	PERFORATED	A15	IP100UCA	1000	130	3	Ø6	1

(1) Without screws.



LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.

END CAPS	Closed
Code	Type
T100MC	CLOSED

