


M100V


LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M100V: External width 155 mm; Internal width 100 mm and overall height 80 mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

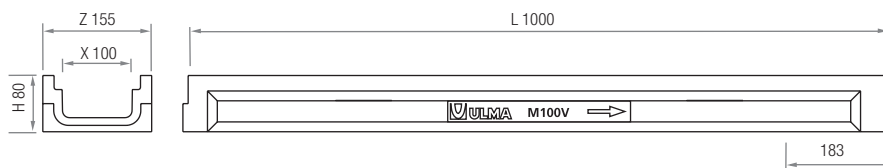

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M100V	1000	80	155	100	90	-	40	120

*Vert. outlets on order.

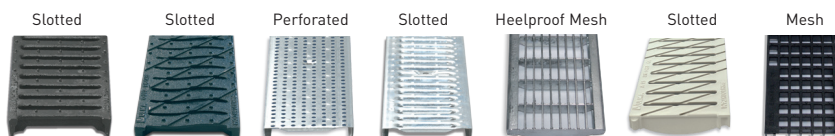


GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX100KCCM	500	123	14	2
	HEELPROOF SLOTTED	C250	FNHX100KCCM	500	123	5	2
GALVANIZED STEEL	PERFORATED	A15	GP100KCA	1000	123	Ø 6	1
	SLOTTED	A15	GN100KCA	1000	123	9	1
	HEELPROOF MESH	B125	GEHX100KCB	1000	123	30 x 10	1
STAINLESS STEEL	SLOTTED	A15	IN100KCA	1000	123	7	1
	PERFORATED	A15	IP100KCA	1000	123	Ø 6	1
	MESH	B125	IEX100KCB	1000	123	30 x 20	1
COMPOSITE	HEELPROOF SLOTTED	A15	PNH100KCAM-GRIS (1)	500	123	5	2
	MESH	B125	PE100KCBM	500	123	14 x 12,5	2

(1) Available in several colors.

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



ACCESSORIES TABLE

END CAPS	Closed
Code	Type
T100MVC	CLOSED

