


M150


LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M150: External width 204 mm; Internal width 150 mm and overall height 80 mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

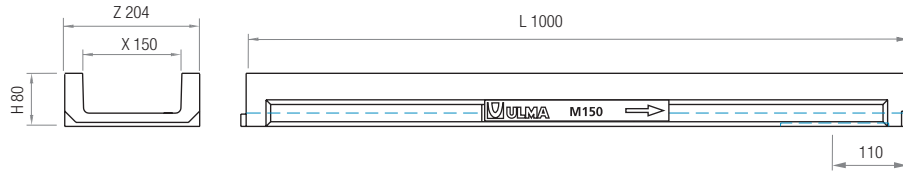

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M150	1000	80	204	150	160	-	89	72

*Vert. outlets on order.

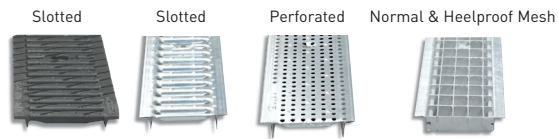


GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX150UCBM	500	200	6	13,75	2
	SLOTTED	C250	FNX150UCCM	500	200	5	13,75	2
GALVANIZED STEEL	SLOTTED	A15	GN150UCA	1000	200	3	8	1
	PERFORATED	A15	GP150UCA	1000	200	3	Ø 5	1
	MESH	B125	GEX150UCB33	1000	200	2	30 x 30	1
	HEELPROOF MESH	B125	GEHX150UCB	1000	200	2	30 x 10	1
STAINLESS STEEL	PERFORATED	A15	IP150UCA	1000	200	3	Ø 5	1
	MESH	B125	IEX150UCB	1000	200	3	30 x 20	1


LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



END CAPS

Closed



Code	Type
T150MC	CLOSED

