


M200K


LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M200K: External width 260 mm; Internal width 200 mm and overall height 125 mm to collect rainwater in 1 metre long units. Integrated galvanized steel edges for lateral protection. Locking system consists of 2 screws per metre.

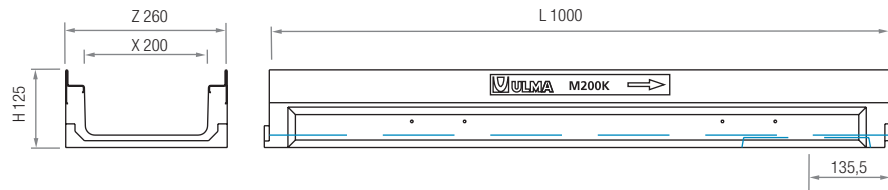

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M200K	1000	125	260	200	160	-	157	40

*Vert. outlets on order.




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200KCCM	500	250	14	2
GALVANIZED STEEL	MESH	B125	GEX200KCB	1000	250	30 x 20	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



END CAPS	
Code	Type
T200MKC	CLOSED

