


EUROSELF

LOAD CLASS
UP TO C250
EN-1433 STANDARD


SELF

ULMA Linear Drainage Channel type EUROSELF: External width 127 mm; Internal width 100 mm and overall height 95 mm to collect rainwater in 1 metre long units. Locking system consist of locking bar and screws.

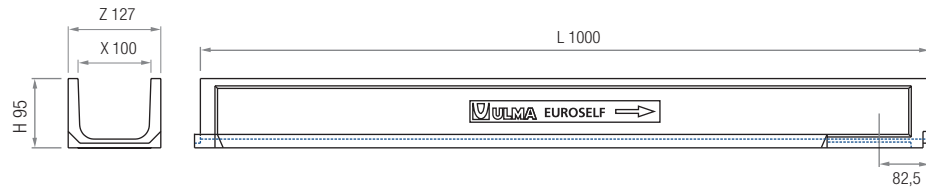

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
EUROSELF	1000	95	127	100	110	-	80	120

*Vert. outlets on order.

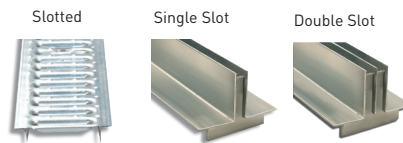

GRATINGS

Material	Design	Load Last	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
GALVANIZED STEEL	SLOTTED	A15	GN100UOA (1)	1000	130	3	8	1
	SINGLE SLOT	C250	GR100UOC (1)	1000	130	70	15	1
	DOUBLE SLOT	C250	GDR100UOC (1)	1000	130	70	2 x 12	1

(1) Without screws.

LOCKING SYSTEM

LOCKING BAR.
Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AEURO100	500	300	130	90/110	90	1	CEURO100

END CAPS	Closed	Open
Code	Type	Ø (mm)
TEURO100C	CLOSED	-
TEURO100A	OPEN	90

GALVANIZED STEEL BUCKET
Code
CEURO100

