


# SELF200

LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

SELF


ULMA Linear Drainage Channel type SELF200: External width 204 mm; Internal width 150 mm and overall height 140 mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS150 and screws.

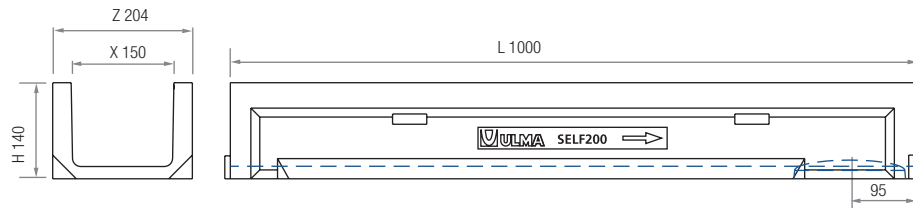

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
SELF200	1000	140	204	150	160	-	180	54

\*Vert. outlets on order.

## GRATINGS

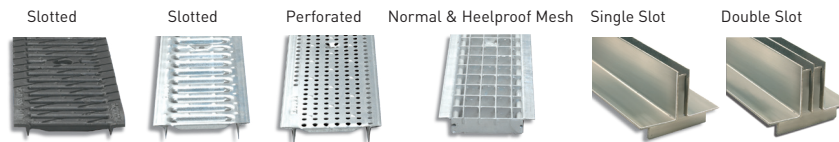


Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX150UCBM	500	200	6	13,75	2
	SLOTTED	C250	FNX150UCCM	500	200	5	13,75	2
GALVANIZED STEEL	SLOTTED	A15	GN150UCA	1000	200	3	8	1
	PERFORATED	A15	GP150UCA	1000	200	3	Ø 5	1
	MESH	B125	GEX150UCB33	1000	200	2	30 x 30	1
	HEELPROOF MESH	B125	GEHX150UCB	1000	200	2	30 x 10	1
	SINGLE SLOT	C250	GR150UOC (1)	1000	200	70	15	1
	DOUBLE SLOT	C250	GDR150UOC (1)	1000	200	70	2 x 12	1
STAINLESS STEEL	PERFORATED	A15	IP150UCA	1000	200	3	Ø 5	1
	MESH	B125	IEX150UCB	1000	200	3	30 x 20	1

(1) Without screws.

## LOCKING SYSTEM

LOCKING BAR.  
Two locking bars and two screws per linear metre.

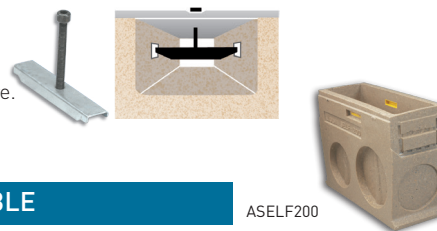

## SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
ASELF200	500	378	204	160/200	160	1	CSELF200

END CAPS	Closed	Open
Code	Type	Ø (mm)
TSELF200C	CLOSED	-
TSELF200A	OPEN	110

GALVANIZED STEEL BUCKET
Code
CSELF200

