


SELF200K

LOAD CLASS
UP TO C250
EN-1433 STANDARD


ULMA Linear Drainage Channel type SELF200K: External width 204 mm; Internal width 150 mm and overall height 162 mm to collect rainwater in 1 metre long units. Integrated galvanized steel* edges for lateral protection. Locking system consists of locking bar CS150 and screws.

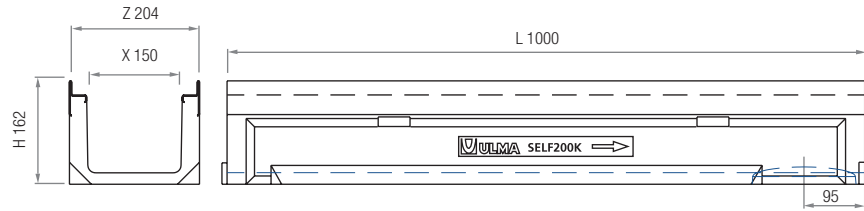

*Also available with stainless steel edge protection.

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
SELF200K	1000	162	204	150	160	-	180	40

*Vert. outlets on order.

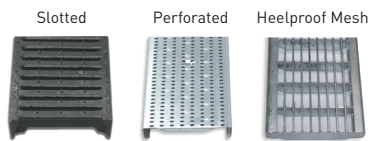

GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX150KCCM	500	195	14	2
GALVANIZED STEEL	PERFORATED	A15	GP150KCA	1000	195	Ø 5	1
	HEELPROOF MESH	B125	GEHX150KCB	1000	195	30 x 10	1
STAINLESS STEEL	PERFORATED	A15	IP150KCA	1000	195	Ø 5	1
	MESH	B125	IEX150KCB	1000	195	30 x 20	1

LOCKING SYSTEM

LOCKING BAR.
Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	ØOutlet (mm)		Sump Units	Bucket
				Lateral	Front		
ASELF200K	500	400	204	160/200	160	1	CSELF200

END CAPS	Closed	Open
Code	Type	Ø (mm)
TSELF200KC	CLOSED	-
TSELF200KA	OPEN	110

GALVANIZED STEEL BUCKET
Code
CSELF200

