


# U250


LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type U250: External width 310 mm; Internal width 250 mm, and overall height between 270 and 370 mm, to collect rainwater in 1 metre long units. Locking system consists of locking bar CS250 and screws.

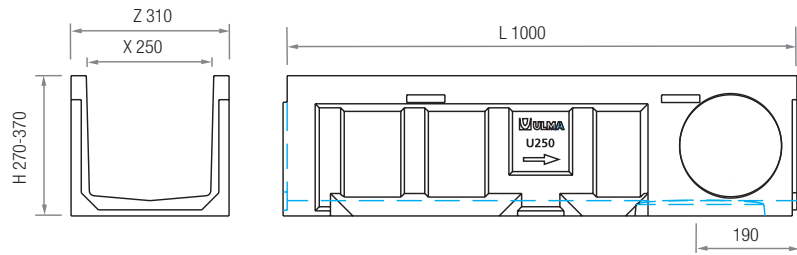

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U250.00R	1000	270	310	250	250	200	580	28
U250.10R	1000	320	310	250	250	200	706	21
U250.20R	1000	370	310	250	250	200	828	21

\*Vert. and horiz. outlets on order.




## GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX250UCBM	500	300	6	13,2	2
	SLOTTED	C250	FNX250UCCM	500	300	6	14	2
GALVANIZED STEEL	MESH	B125	GEX250UCB	1000	300	3	30 x 20	1

## LOCKING SYSTEM

LOCKING BAR.  
Two locking bars and two screws per linear metre.

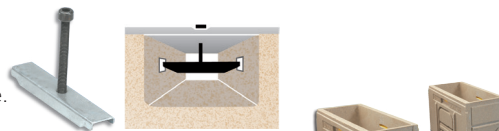

## SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU250	500	375	310	160/200	-	1	-
AU250S + A250B	500	725*	310	160/200	-	2	C250

\* The sump unit can be higher incorporating an intermediate unit.

Channel	END CAPS		Type	Ø (mm)
	Code	Type		
U250.00R	T250U00C	CLOSED	CLOSED	-
	T250U00A	OPEN	OPEN	200
U250.10R	T250U10C	CLOSED	CLOSED	-
	T250U10A	OPEN	OPEN	200
U250.20R	T250U20C	CLOSED	CLOSED	-
	T250U20A	OPEN	OPEN	200

GALVANIZED STEEL BUCKET *	
Code	Type
C250	C250



\*Only applicable if 2 sump units are installed.

