


U150

LOAD CLASS
UP TO C250
EN-1433 STANDARD


ULMA Linear Drainage Channel type U150: External width 204 mm; Internal width 150 mm; Available with overall heights between 200 mm and 300 mm. Suitable for cascaded type slope, to collect rainwater in 1 metre long units. Locking system consists of locking bar CS150 and screws.

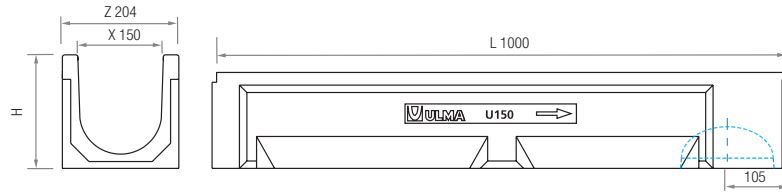

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U150.00R	1000	200	204	150	160	110	230	45
U150.10R	1000	250	204	150	160	-	305	36
U150.20R	1000	300	204	150	160	-	380	27

*Vert. and horiz. outlets on order.

GRATINGS

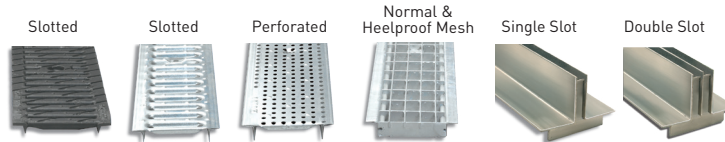


Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x L.M)
DUCTILE IRON	SLOTTED	B125	FNX150UCBM	500	200	5	13,75	2
	SLOTTED	C250	FNX150UCCM	500	200	5	13,75	2
GALVANIZED STEEL	SLOTTED	A15	GN150UCA	1000	200	3	8	1
	PERFORATED	A15	GP150UCA	1000	200	3	Ø 5	1
	MESH	B125	GEX150UCB33	1000	200	2	30 x 30	1
	HEELPROOF MESH	B125	GEHX150UCB	1000	200	2	30 x 10	1
	SINGLE SLOT	C250	GR150UOC (1)	1000	200	70	15	1
	DOUBLE SLOT	C250	GDR150UOC (1)	1000	200	70	2 x 12	1
STAINLESS STEEL	PERFORATED	A15	IP150UCA	1000	200	3	Ø 5	1
	MESH	B125	IEX150UCB	1000	200	3	30 x 20	1

(1) Without screws.

LOCKING SYSTEM

LOCKING BAR.

Two locking bars and two screws per linear metre.

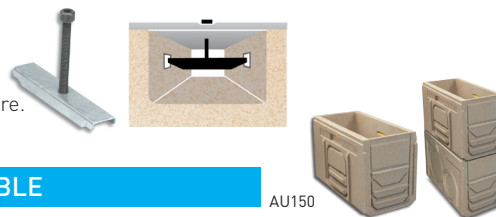

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU150	500	328	204	160	110	1	-
AU150S + A150B	500	633*	204	160	110	2	C150

* The sump unit can be higher incorporating an intermediate unit.

END CAPS			
Channel	Code	Type	Ø (mm)
U150.00R	T150U00C	CLOSED	-
	T150U00A	OPEN	160
U150.10R	T150U10C	CLOSED	-
	T150U10A	OPEN	160
U150.20R	T150U20C	CLOSED	-
	T150U20A	OPEN	160

STEP UNITS
Code
CE150

GALVANIZED STEEL BUCKET *
Code
C150

*Only applicable if 2 sump units are installed.

WITHOUT SLOPE

CASCADED SLOPE



SLOPE DESIGNS