


U200

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type U200: External width 260 mm; Internal width 200 mm; Available with overall heights between 240 mm and 340 mm. Suitable for cascaded type slope to collect rainwater in 1 metre long units. Locking system consists of locking bar CS200 and screws.

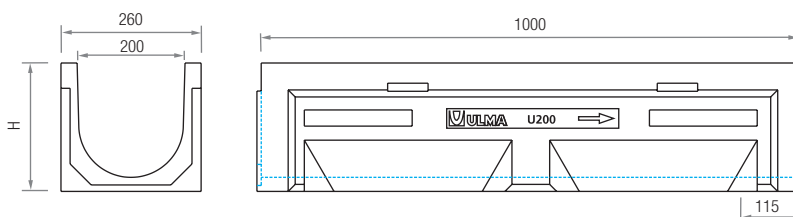

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U200.00R	1000	240	260	200	160	-	374	28
U200.10R	1000	290	260	200	160	-	473	28
U200.20R	1000	340	260	200	160	-	571	21

*Vert. outlets on order.




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200UCCM	500	250	6	10	2
GALVANIZED STEEL	SLOTTED	A15	GN200UCA	1000	250	4	8,5	1
	MESH	B125	GEX200UCB33	1000	250	2,5	30 x 30	1
	HEELPROOF MESH	B125	GEHX200UCB	1000	250	2,5	30 x 10	1

LOCKING SYSTEM

LOCKING BAR.
Two locking bars and two screws per linear metre.

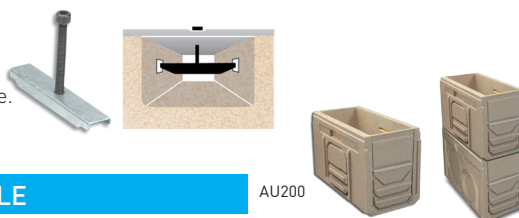

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU200	500	338	260	160/200	-	1	-
AU200S + A200B	500	680*	260	160/200	-	2	C200

* The sump unit can be higher incorporating an intermediate unit.

Channel	END CAPS		Type	Ø (mm)
	Code	Type		
U200.00R	T200U00C	CLOSED	-	-
	T200U00A	OPEN	200	-
U200.10R	T200U10C	CLOSED	-	-
	T200U10A	OPEN	200	-
U200.20R	T200U20C	CLOSED	-	-
	T200U20A	OPEN	200	-

STEP UNITS	GALVANIZED STEEL BUCKET *
Code CE200	Code C200

*Only applicable if 2 sump units are installed.

WITHOUT SLOPE CASCADED SLOPE

SLOPE DESIGNS

