


# U200K


LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type U200K: External width 260 mm; Internal width 200 mm; Suitable for cascade type slope and available with overall heights between 263 mm and 363 mm to collect rainwater in 1 metre long units; Integrated galvanized steel edges for lateral protection. Locking system consists of CS200 locking bar and screws.

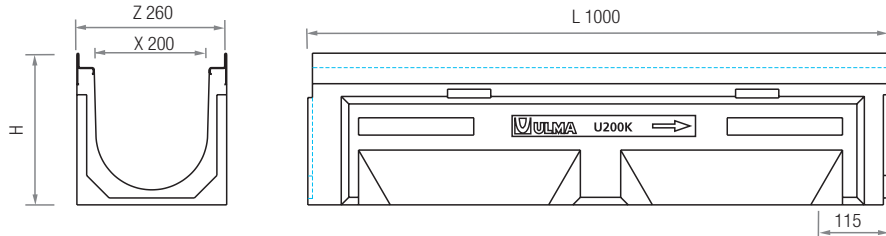

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U200K00R	1000	263	260	200	160	-	374	28
U200K10R	1000	313	260	200	160	160	473	21
U200K20R	1000	363	260	200	160	-	571	21

\*Vert. outlets on order.




## GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200KCCM	500	250	14	2
GALVANIZED STEEL	MESH	B125	GEX200KCB	1000	250	30 x 20	1

## LOCKING SYSTEM

LOCKING BAR.  
Two locking bars and two screws per linear metre.



## SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AK200	500	363	260	160/200	-	1	-
AK200S+A200B	500	705*	260	160/200	-	2	C200

\* The sump unit can be higher incorporating an intermediate unit.

END CAPS		Closed	Open
Channel	Code	Type	Ø (mm)
U200K00R	T200K00C	CLOSED	-
	T200K00A	OPEN	200
U200K10R	T200K10C	CLOSED	-
	T200K10A	OPEN	200
U200K20R	T200K20C	CLOSED	-
	T200K20A	OPEN	200

STEP UNITS
Code
CE200



GALVANIZED STEEL BUCKET*
Code
C200



\*Only applicable if 2 sump units are installed.

## SLOPE DESIGNS

