


# U300K

LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type U300K: External width 360 mm; Internal width 300 mm and available with overall heights between 390 mm and 490 mm; Suitable for cascade type slope to collect rainwater in 1 metre long units; Integrated galvanized steel edges for lateral protection. Locking system consists of CS300 locking bar and screws.

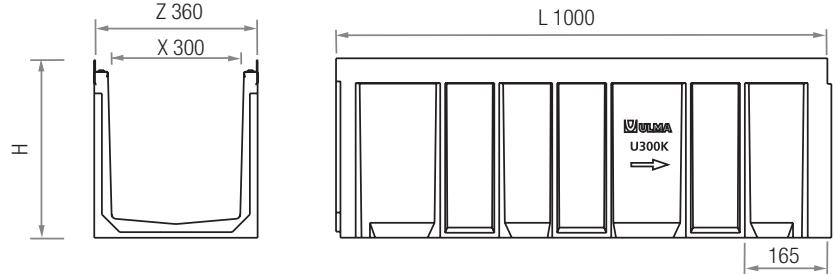

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U300K00R	1000	390	360	300	200	-	975	15
U300K10R	1000	440	360	300	200	-	1110	10
U300K20R	1000	490	360	300	200	-	1250	10

\*Vert. outlets on order.

Slotted

Mesh




## GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX300KCCM	500	351	14	2
GALVANIZED STEEL	MESH	B125	GEX300KCB	1000	260	30 x 20	1

## LOCKING SYSTEM

LOCKING BAR.

Two locking bars and two screws per linear metre.



## SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AK300	500	390	360	200	-	1	-
AK300S+A300B	500	730*	360	200	-	2	C250

\* The sump unit can be higher incorporating an intermediate unit.

Channel	END CAPS		Type	Ø (mm)
	Code	Open		
U300K00R	T300K00C	Closed	CLOSED	-
	T300K00A	Open	OPEN	300
U300K10R	T300K10C	Closed	CLOSED	-
	T300K10A	Open	OPEN	300
U300K20R	T300K20C	Closed	CLOSED	-
	T300K20A	Open	OPEN	300

## STEP UNITS

Code

CE300



## GALVANIZED STEEL BUCKET\*

Code

C250



\*Only applicable if 2 sump units are installed.

## SLOPE DESIGNS

