


U150K

LOAD CLASS
UP TO C250
EN-1433 STANDARD


ULMA Linear Drainage Channel type U150K: External width 204 mm; Internal width 150 mm; Suitable for cascade type slope and available with overall heights between 220 mm and 320 mm to collect rainwater in 1 metre long units; Integrated galvanized steel* edges for lateral protection. Locking system consists of CS150 locking bar and screws.

*Also available with stainless steel edge protection.

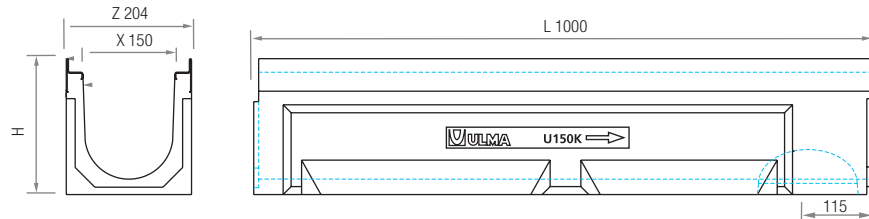

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
U150K00R	1000	220	204	150	160	110	230	45
U150K10R	1000	270	204	150	160	110	305	36
U150K20R	1000	320	204	150	160	-	380	27

*Vert. and horiz. outlets on order.

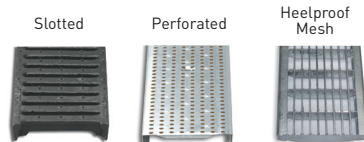

GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX150KCCM	500	195	14	2
GALVANIZED STEEL	PERFORATED	A15	GP150KCA	1000	195	Ø 5	1
	HEELPROOF MESH	B125	GEHX150KCB	1000	195	30 x 10	1
STAINLESS STEEL	PERFORATED	A15	IP150KCA	1000	195	Ø 5	1
	MESH	B125	IEX150KCB	1000	195	30 x 20	1

LOCKING SYSTEM

LOCKING BAR.
Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AK150	500	350	204	160	110	1	-
AK150S+A150B	500	655*	204	160	110	2	C150

* The sump unit can be higher incorporating an intermediate unit.

Channel	END CAPS		Type	Ø (mm)
	Code	Ø (mm)		
U150K00R	T150K00C	Closed	CLOSED	-
	T150K00A	Open	OPEN	160
U150K10R	T150K10C	Closed	CLOSED	-
	T150K10A	Open	OPEN	160
U150K20R	T150K20C	Closed	CLOSED	-
	T150K20A	Open	OPEN	160

STEP UNITS

Code


CE150



GALVANIZED STEEL BUCKET *

Code

C150



*Only applicable if 2 sump units are installed.

SLOPE DESIGNS

