


# EUROKIT

LOAD CLASS  
**UP TO A15**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type EUROKIT: External width 120 mm; Internal width 98 mm and overall height 85 mm to collect rainwater in 1 metre long units. Locking system "click" type without screws.

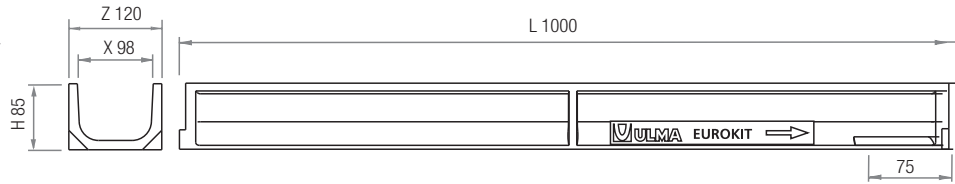

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
EUROKIT	1000	85	120	98	110	-	66,5	108 (with grating)

\*Vert. outlets on order.





## GRATING

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
GALVANIZED STEEL	SLOTTED	A15	GNS100UOA	1000	120	3	7	1

## LOCKING SYSTEM

CLICK. Without screws



END CAPS	Closed		Open	
Code	Type	Ø (mm)	Type	Ø (mm)
TEUROKITC	CLOSED	-	-	-
TEUROKITA	OPEN	60	-	-

