


# SU200


LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type SU200: External width 250 mm; Internal width 200 mm; Available with overall heights between 240 mm and 390 mm. Suitable for cascaded type slope to collect rainwater in 1 metre long units. Locking system consists of locking bar CS200 and screws.

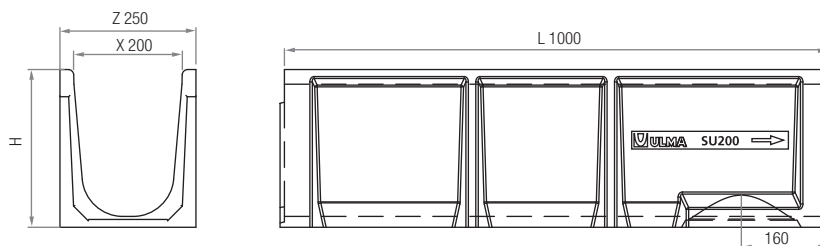

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
SU200.00R	1000	240	250	200	200	-	385	28
SU200.10R	1000	290	250	200	200	-	465	28
SU200.20R	1000	340	250	200	200	-	540	21
SU200.30R	1000	390	250	200	200	-	620	21

\*Vert. outlets on order.

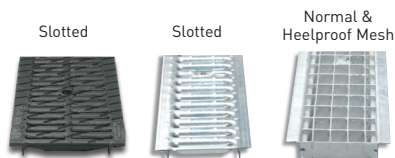


## GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200UCCM	500	250	6	10	2
GALVANIZED STEEL	SLOTTED	A15	GN200UCA	1000	250	4	8,5	1
	MESH	B125	GEX200UCB33	1000	250	2,5	30 x 30	1
	HEELPROOF MESH	B125	GEHX200UCB	1000	250	2,2	30 x 10	1

## LOCKING SYSTEM

LOCKING BAR.  
Two locking bars and two screws per linear metre.

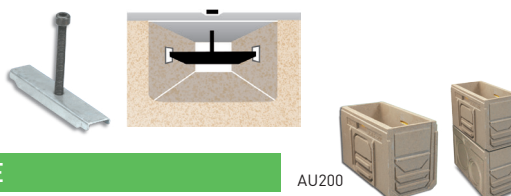

## SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU200*	500	338	260	160/200	-	1	-
AU200S + A200B*	500	680**	260	160/200	-	2	C200

\*Available up to 340 mm height.

\*\* The sump unit can be higher incorporating an intermediate unit.

END CAPS		Closed		Open	
Channel	Code	Type	Ø (mm)		
SU200.00R	T200SU00C	CLOSED	-		
	T200SU00A	OPEN	200		
SU200.10R	T200SU10C	CLOSED	-		
	T200SU10A	OPEN	200		
SU200.20R	T200SU20C	CLOSED	-		
	T200SU20A	OPEN	200		
SU200.30R	T200SU30C	CLOSED	-		
	T200SU30A	OPEN	200		

## STEP UNITS

Code

CE200



## GALVANIZED STEEL BUCKET\*

Code

C200



\*Only applicable if 2 sump units are installed.

## SLOPE DESIGNS

