



F250K

SLOPE
2,5%

LOAD CLASS
UP TO F900
EN-1433 STANDARD

ULMA Linear Drainage Channel type F250K: External width 312 mm; Internal width 250 mm; Available with overall heights between 150 mm and 650 mm. Suitable also with 2,5% presloped, cascaded or mixed slope, to collect rainwater in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanized steel* edges for lateral protection.

*Also available with cast iron edges.

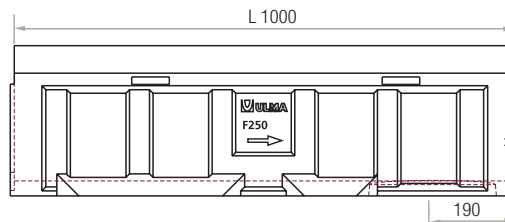

Channel	L (mm)	H (mm)		Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Slope	Pcs. (x pallet)
		h	H	Z	X	Vert.	Horiz.			
F250K01RM	500	150	150	316	250	-	-	220	-	*
F250K01	1000	150	175	316	250	-	-	280	2,5%	*
F250K02	1000	175	200	312	250	-	-	340	2,5%	*
F250K03	1000	200	225	312	250	-	-	400	2,5%	*
F250K04	1000	225	250	312	250	-	-	460	2,5%	*
F250K05	1000	250	275	312	250	-	-	520	2,5%	*
F250K06	1000	275	300	312	250	-	-	580	2,5%	*
F250K00R	1000	300	300	312	250	250	-	580	-	28
F250K07	1000	300	325	312	250	-	-	640	2,5%	*
F250K08	1000	325	350	312	250	-	-	700	2,5%	*
F250K10R	1000	350	350	312	250	250	-	700	-	28
F250K09	1000	350	375	312	250	-	-	760	2,5%	*
F250K10	1000	375	400	312	250	-	-	820	2,5%	*
F250K20R	1000	400	400	312	250	250	-	820	-	21
F250K11	1000	400	425	312	250	-	-	870	2,5%	*
F250K12	1000	425	450	312	250	-	-	930	2,5%	*
F250K30R	1000	450	450	312	250	-	-	935	-	14
F250K13	1000	450	475	312	250	-	-	985	2,5%	*
F250K14	1000	475	500	312	250	-	-	1045	2,5%	*
F250K15	1000	500	525	312	250	-	-	1100	2,5%	*
F250K16	1000	525	550	312	250	-	-	1160	2,5%	*
F250K17	1000	550	575	312	250	-	-	1215	2,5%	*
F250K18	1000	575	600	312	250	-	-	1270	2,5%	*
F250K19	1000	600	625	312	250	-	-	1320	2,5%	*
F250K20	1000	625	650	312	250	-	-	1380	2,5%	*

*Vert. and horiz. outlets on order.

CONTINUOUS PRESLOPED OF 2,5%

AB250S

F250K20 F250K19 F250K18 F250K04 F250K03 F250K02 F250K01 F250B01M F250K01 F250K02 F250K03 F250K04 F250K18 F250K19 F250K20

Sump Unit A250B415
Outlet Diam. 415 mm

Sump Unit A250B415
Outlet Diam. 415 mm

FIRST POLYMER CONCRETE CHANNEL WITH PRESLOPED OF 2,5% ON THE MARKET

- High hydraulic capacity.
- Self-cleaning effect.
- Minimum maintenance.




GRATING

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX250FTCM	500	301	13,75	2
	SLOTTED	D400	FNX250FTDM	500	301	13,75	2
	SLOTTED	F900	FNX250FTFM	500	301	19	2
	SOLID	F900	FC250FTFM	500	301	-	2
GALVANIZED STEEL	SINGLE SLOT	D400	GRL250FOD (1)	1000	301	18 / H150	1

(1) Without screws.

LOCKING SYSTEM

8 BOLT LOCKING SYSTEM.
8 screws with protection cap, per linear metre.

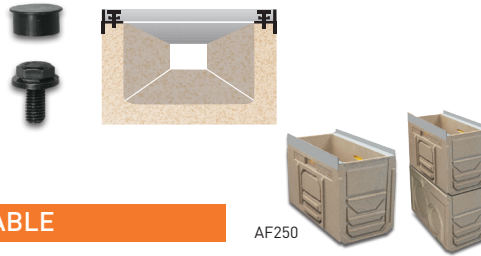

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Lateral Outlet (mm)	Ø Frontal Outlet (mm)	Sump Units
AF250	500	400	316	160/200	-	1
AB250	500	400	316	160/200	-	1
AF250S-65	500	680	312	415	-	1
AB250S-65	500	680	312	415	-	1
AF250S+A250B	500	750*	316	160/200	-	2
AB250S+A250B	500	750*	316	160/200	-	2
AF250S + A250B415	500	916*	316	415	200	2
AB250S+A250B415	500	916*	316	415	200	2

* The sump unit can be higher incorporating an intermediate unit.

END CAPS		Closed	Open
Channel	Code	Type	Ø (mm)
F250K00R	T250K00C	CLOSED	-
	T250K00A	OPEN	200
F250K10R	T250K10C	CLOSED	-
	T250K10A	OPEN	200
F250K20R	T250K20C	CLOSED	-
	T250K20A	OPEN	200
F250K30R	T250K30C	CLOSED	-
	T250K30A	OPEN	200


STEP UNITS

Code
CE250




BUCKET*

Code
C250




*Only applicable if 2 sump units are installed.

SLOPE DESIGNS



WITHOUT SLOPE



2,5 % PRESLOPED



CASCADED SLOPE



MIXED SLOPE