


S250F

LOAD CLASS
UP TO F900
EN-1433 STANDARD


ULMA Linear Drainage Channel type S250F: External width 262 mm; Internal width 200 mm and overall height of 180 mm to collect rainwater in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanized steel* edges for lateral protection.

*Also available with cast iron edges.

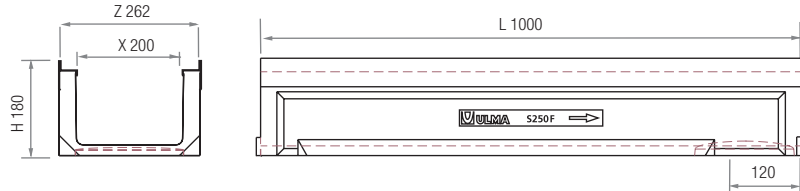

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
S250F	1000	180	262	200	160/200	-	260	28

*Vert. outlets on order.



GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	D400	FNX200FTDM	500	251	13,75	2
	SLOTTED	E600	FNX200FTEM	500	251	13,75	2
	SLOTTED	F900	FNX200FTFM	500	251	19	2
	SOLID	F900	FC200FTFM	500	251	-	2

LOCKING SYSTEM

8 BOLT LOCKING SYSTEM.
8 screws with protection cap, per linear metre.




SUMP UNITS AND ACCESSORIES TABLE

AS250F

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AS250F	500	500	262	315	160	1	C200

END CAPS



Code	Type	Ø (mm)
TSELF250KC	CLOSED	-
TSELF250KA	OPEN	160

