


EUROSELFV+

LOAD CLASS
UP TO C250
EN-1433 STANDARD


ULMA Linear Drainage Channel, type EUROSELFV+; External width 130 mm, Internal width 100 mm; Available with overall heights between 95 mm and 145 mm, to collect rainwater in 1 meter long units, optimized V-shape with self-cleaning effect; especially designed for channel runs with no longitudinal slope. Locking system consist of locking bar and screws.

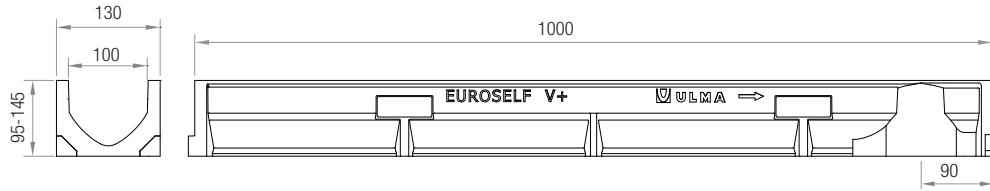

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
EUROSELFV+ H95	1000	95	130	100	110	-	66	120
EUROSELFV+ H125	1000	125	130	100	110	-	95	105
EUROSELFV+ H145	1000	145	130	100	110	-	114	90

*Vert. outlets on order.

OPTIMIZED V-SHAPE

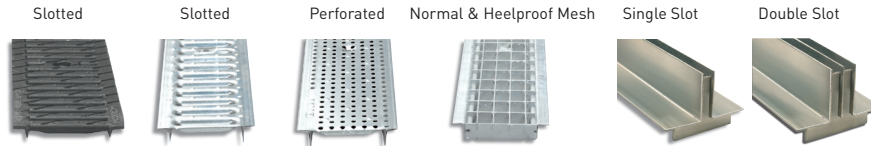

GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX100UCBM	500	130	6	14,9	2
	SLOTTED	C250	FNX100UCCM	500	130	6	13	2
GALVANIZED STEEL	SLOTTED	A15	GN100UCA	1000	130	3	9	1
	SLOTTED	A15	GN100UOA (1)	1000	130	3	8	1
	PERFORATED	A15	GP100UCA	1000	130	3	Ø 6	1
	MESH	B125	GEX100UCB33	1000	130	2	30 x 30	1
	HEELPROOF MESH	B125	GEHX100UCB	1000	130	2	30 x 10	1
	SINGLE SLOT	C250	GR100UOC (1)	1000	130	70	15	1
	DOUBLE SLOT	C250	GDR100UOC (1)	1000	130	70	2 x 12	1
STAINLESS STEEL	SLOTTED	A15	IN100UCA	1000	130	3	7	1
	PERFORATED	A15	IP100UCA	1000	130	3	Ø 6	1
	MESH	B125	IEX100UCB	1000	130	3	30 x 20	1

(1) Without screws.

LOCKING SYSTEM

LOCKING BAR.
Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AEURO100	500	300	130	90/110	90	1	CEURO100

END CAPS		Closed		Open	
Code	Type	Ø (mm)			
TEUROVH95C	CLOSED	-			
TEUROVH95A	OPEN	90			
TEUROVH125C	CLOSED	-			
TEUROVH125A	OPEN	90			
TEUROVH145C	CLOSED	-			
TEUROIVH145A	OPEN	110			

GALVANIZED STEEL BUCKET

Code
CEURO100

