


# SELF


LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD

ULMA Linear Drainage Channel type SELF: External width 130 mm; Internal width 100 mm and overall height 115 mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS100 and screws.

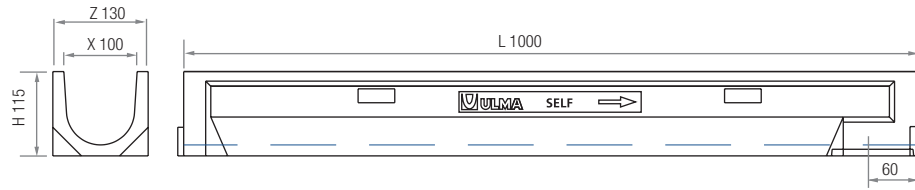

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
SELF	1000	115	130	100	110	-	85	105

\*Vert. outlets on order.

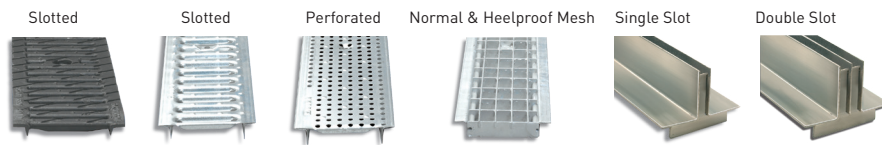


## GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX100UCBM	500	130	6	14,9	2
	SLOTTED	C250	FNX100UCCM	500	130	6	13	2
GALVANIZED STEEL	SLOTTED	A15	GN100UCA	1000	130	3	9	1
	SLOTTED	A15	GN100UOA (1)	1000	130	3	8	1
	PERFORATED	A15	GP100UCA	1000	130	3	Ø6	1
	MESH	B125	GEX100UCB33	1000	130	2	30x30	1
	HEELPROOF MESH	B125	GEHX100UCB	1000	130	2	30x10	1
	SINGLE SLOT	C250	GR100UOC (1)	1000	130	70	15	1
	DOUBLE SLOT	C250	GDR100UOC (1)	1000	130	70	2x12	1
STAINLESS STEEL	SLOTTED	A15	IN100UCA	1000	130	3	7	1
	PERFORATED	A15	IP100UCA	1000	130	3	Ø6	1
	MESH	B125	IEX100UCB	1000	130	3	30x20	1

(1) Without screws.

## LOCKING SYSTEM

LOCKING BAR.  
Two locking bars and two screws per linear metre.

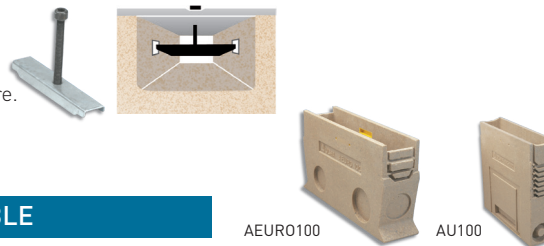

## SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AEURO100	500	300	130	90/110	90	1	CEURO100
AU100	500	542	130	110/160	90	1	CU100

END CAPS		
Code	Type	Ø (mm)
TSELF100C	CLOSED	-
TSELF100A	OPEN	90

GALVANIZED STEEL BUCKET	
Code	
CU100	

