
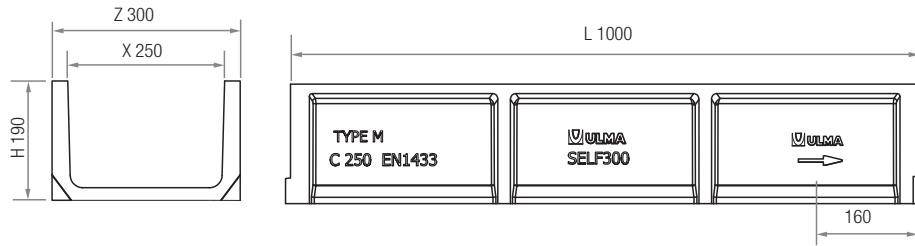


SELF300


LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type SELF300: External width 300 mm; Internal width 250 mm and overall height 190 mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS250 and screws.



Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
SELF300	1000	190	300	250	200	-	407	35

*Vert. outlets on order.




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX250UCBM	500	300	6	13,2	1
	SLOTTED	C250	FNX250UCCM	500	300	6	14	1
GALVANIZED STEEL	MESH	B125	GEX250UCB	1000	300	3	30 x 20	1

LOCKING SYSTEM

LOCKING BAR.
Two locking bars and two screws per linear metre.

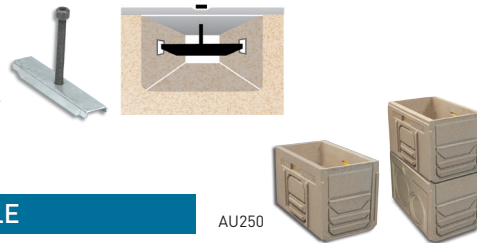

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU250	500	375	310	160/200	-	1	-
AU250S + A250B	500	725*	310	160/200	-	2	C250

* The sump unit can be higher incorporating an intermediate unit.

END CAPS		Closed	Open
Code	Type	Ø (mm)	
TSELF300C	CLOSED	-	
TSELF300A	OPEN	160	

GALVANIZED STEEL BUCKET *

Code
C250

* Only applicable if 2 sump units are installed.

